


- | | |
|------------------------|-------------------------------|
| PIN 1: TEC (-) | PIN 6: THERMISTOR |
| PIN 2: | PIN 7: LASER CATHODE (-) |
| PIN 3: CASE | PIN 8: PHOTODIODE ANODE (+) |
| PIN 4: LASER ANODE (+) | PIN 9: PHOTODIODE CATHODE (-) |
| PIN 5: THERMISTOR | PIN 10: TEC (+) |

- THERMOELECTRIC COOLER RATED 3.6 AMP, 9.0 VOLTS MAXIMUM.
- THERMISTOR CONSTANTS: A=1.129 E-3, B=2.341 E-4, C=0.878 E-7
- THERMISTOR RESISTANCE:

| | |
|----------------|-----------------|
| 10.0 K @ 25 °C | 12.5 K @ 20 °C |
| 15.7 K @ 15 °C | 19.9 K @ 10 °C |
| 25.4 K @ 5 °C | 32.7 K @ 0 °C |
| 42.3 K @ -5 °C | 55.3 K @ -10 °C |

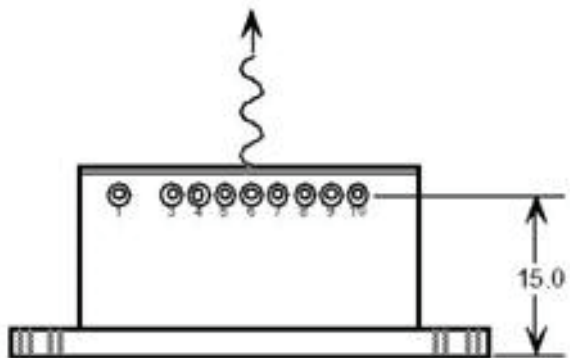

ALL DIMENSIONS IN MILLIMETERS

HHL PACKAGE- WINDOW SECTION DETAIL

