

FEATURES

- 100 mm² Square Active Area
- Responsivity @ 3 nm 0.16 A/W
- 200 nm titanium & 50 nm carbon filter
- Detection Range 1 nm to 12 nm
- Shipped with Protective Cover

Electro-Optical Characteristics at 25°C


Parameters	Test Conditions	Min	Typ	Max	Units
Active Area	10 mm x 10 mm		100		mm ²
Responsivity	(see graph on next page)		0.16		A/W
Shunt Resistance, Rsh	@ ±10 mV	20			Ohms
Capacitance, C	V _R = 0 V		10	44	nF

Thermal Parameters


Storage and Operating Temperature Range	Units
Ambient	-10° to 40°C
Nitrogen or Vacuum	-20 to 80°C
Lead Soldering Temperature*	260°C

*0.080" from case for 10 seconds.


Capacitance vs. Bias Voltage

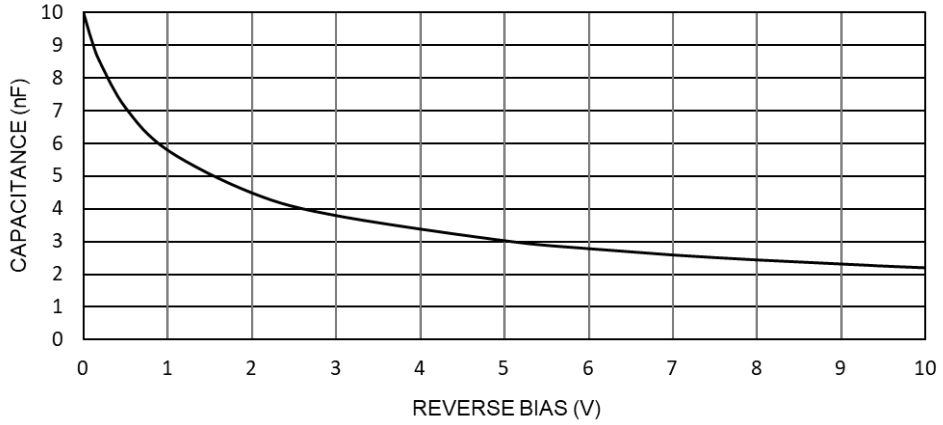

Typical Responsivity at 25°C

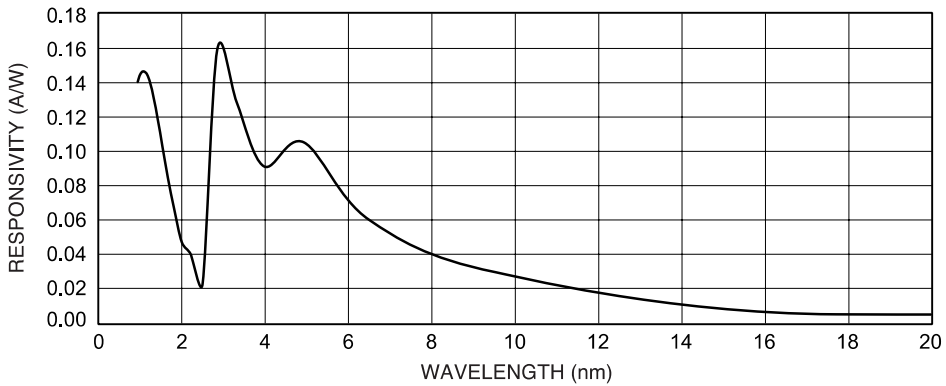

Package Information

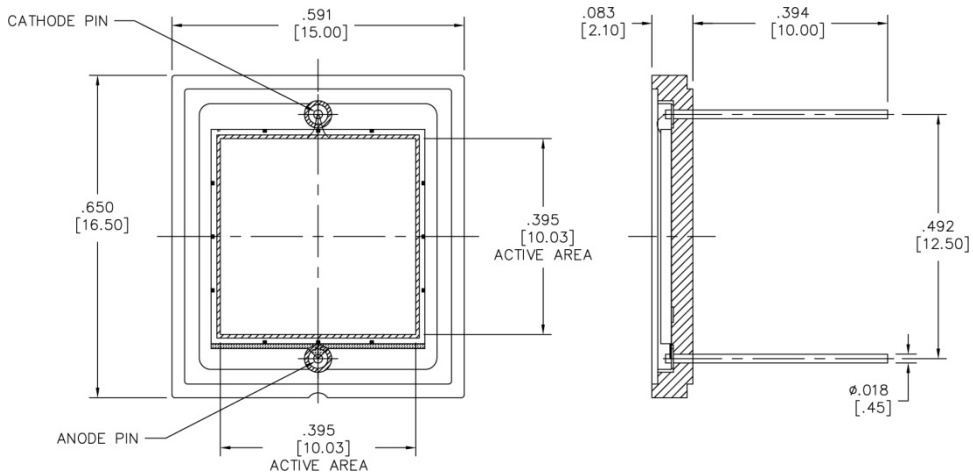

Dimensions are in inch [metric] units.

Specifications are subject to change without prior notice.