

FEATURES

- TO-5 Hermetic Package
- Circular Active Area
- Low Capacitance
- Isolated Case

Electro-Optical Characteristics at 25°C


Parameters	Test Conditions	Min	Typ	Max	Units
Active Area	2.52 mm Dia.		5		mm ²
Responsivity	@ 632 nm	0.35	0.4		A/W
Dark Current, I _{dr}	V _R = 10 V		1	3	nA
Reverse Breakdown Voltage, V _R	I _R = 10 uA	25	60		Volts
Capacitance, C	V _R = 10 V		11		pF
Rise Time	V _R = 10 V		10		nsec
Series Resistance	V _f = 1 V		35	100	Ohms

Thermal Parameters


Parameters	Units
Storage and Operating Temperature Range	-55°C to 100°C
Maximum Junction Temperature	100°C
Lead Soldering Temperature ¹	260°C

¹ 1/16" from case for 10 seconds.


Capacitance vs Bias Voltage

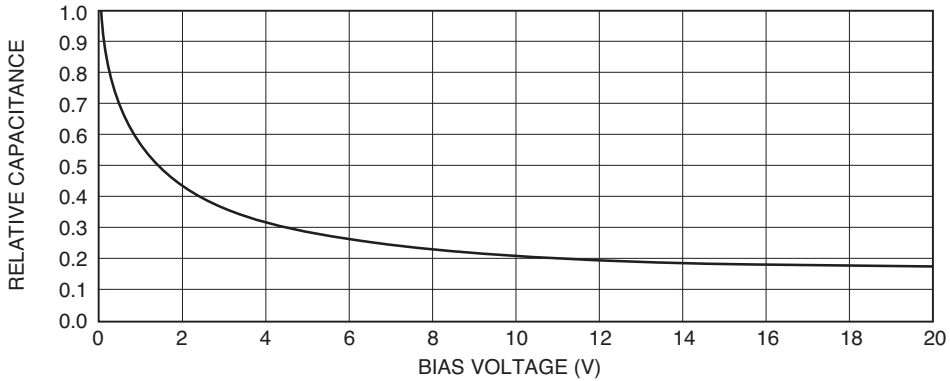


Typical Spectral Response

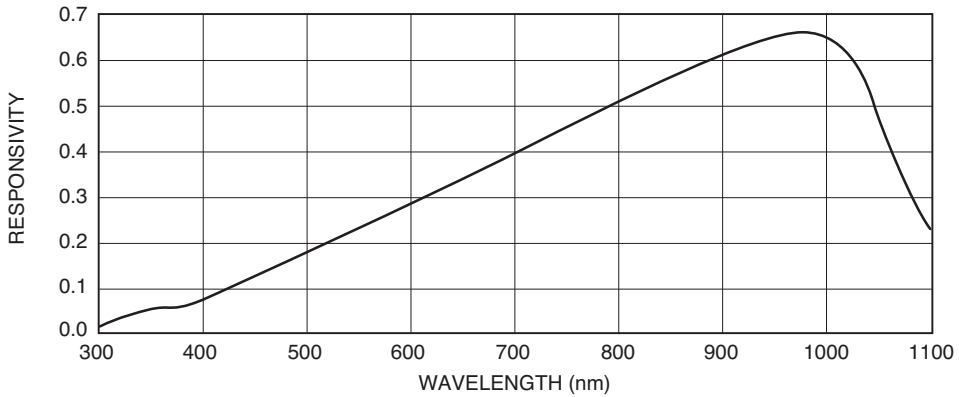

Dark Current vs Voltage

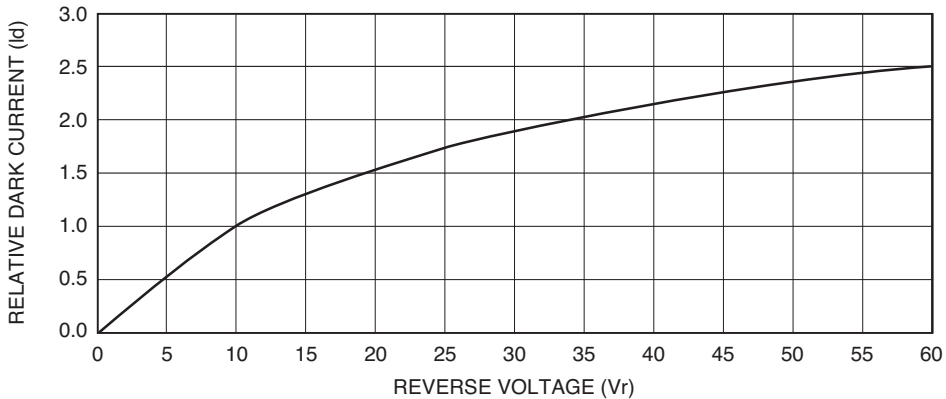

Package Information

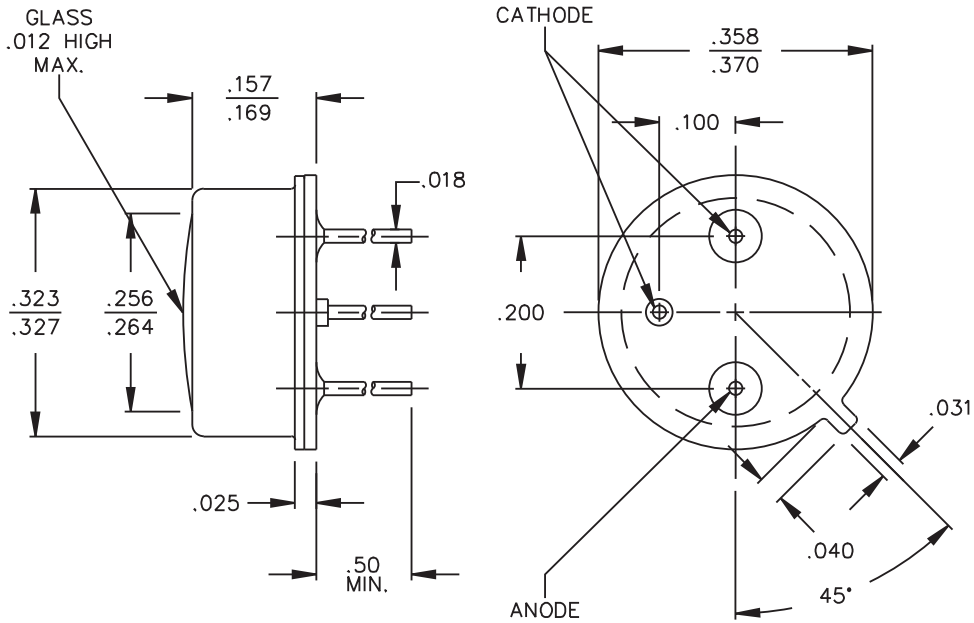

Dimensions are in inch [metric] units.

Specifications are subject to change without prior notice.

1260 Calle Suerte, Camarillo, California 93012
 Phone: +1 805.499.0335 | Fax: +1 805.499.8108 | sales@optodiode.com | www.optodiode.com