

QLD106L-6430G series

1064 nm DFB Laser Butterfly Package

C00240-01 October 2020



1. DESCRIPTION

QLD106L-6430G is a 1064-nm distributed feedback (DFB) laser for use in seeder for fiber lasers and sensing applications. The laser is assembled into a 14-pin butterfly package with a monitor PD and a thermo-electric cooler.

2. FEATURES

- Single longitudinal mode operation at 1064 nm
- Fiber-pigtailed 14-pin butterfly package with a monitor PD and a TEC
- Without an optical isolator and with one polarizer
- Polarization maintaining fiber integration
- 50 ps gain switched optical pulse

3. APPLICATIONS

- Seeder for fiber lasers
- Sensing

4. ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Optical Output power (Gain switch operation)	P_p	150	mW
Optical Output power (CW)	P_f	50	mW
LD Forward Current (CW)	I_f	250	mA
LD Reverse Voltage	V_{RLD}	2	V
TEC Drive Current	I_{TEC}	2	A
TEC Drive Voltage	V_{TEC}	4.3	V
Operation Temperature	T_c	0 to 60	°C
Storage Temperature	T_{stg}	-40 to 85	°C
Lead Soldering Temperature (5 s)	T_{slid}	230	°C

5. OPTICAL AND ELECTRICAL CHARACTERISTICS

 ($T_{LD} = 25^{\circ}\text{C}$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Optical pulse width	PW	gain switched operation		50	-	ps
Peak output power	P_p	gain switched operation	30	50	-	mW
Peak Wavelength	λ_p	gain switched operation	1059*	1064	1069*	nm
Pulsed side-mode suppression ratio	SMSR _P	gain switched operation	-	30	-	dB
Pulsed spectral line width	$\Delta\lambda$	gain switched operation	-	0.1	-	nm
Temperature Coefficient of λ_p	$d\lambda_p/dT$	CW	-	0.08	-	nm/K
Current Coefficient of λ_p	$d\lambda_p/dI$	CW	-	0.008	-	nm/mA
Polarization Extinction Ratio	PER	CW, $P_f=30$ mW	15	20	-	dB
Monitor PD Current	I_m	CW, $P_f=30$ mW	50	200	800	μA
Thermistor Resistance	R _{th}	$T_{LD} = 25^{\circ}\text{C}$, B=3900 K	9.5	10	10.5	k Ω

*Peak wavelength tolerance of +/- 1 nm is available as an option.


6. PRODUCT PART NUMBER

Part Number	Fiber Type	Fiber Diameter	Connector
QLD106L-6430G	Polarization maintaining fiber	900um	FC/APC
QLD106L-6430G-11		250um	Ferrule

7. OUTLINE DRAWING

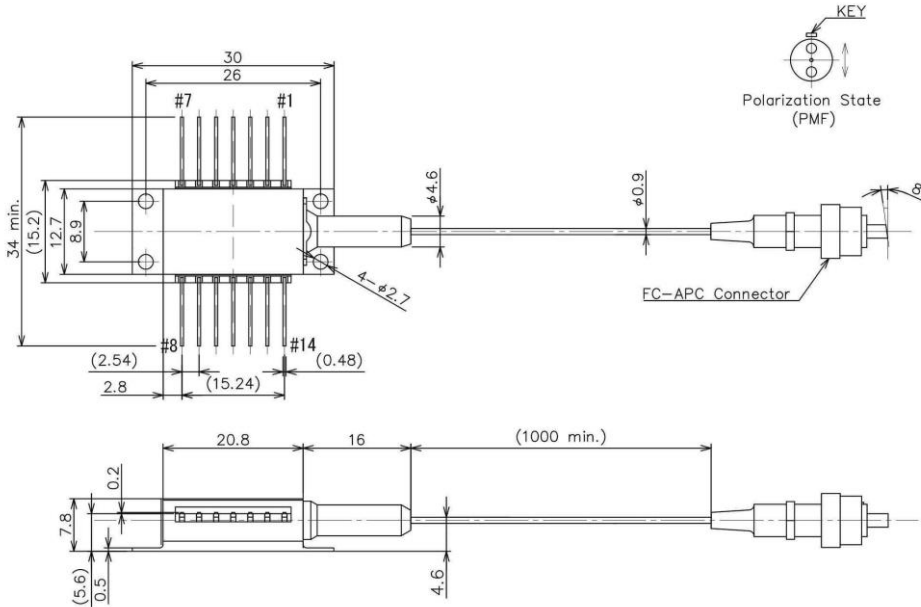


(a) 900um fiber diameter and FC/APC connector type (QLD106L-6430G)

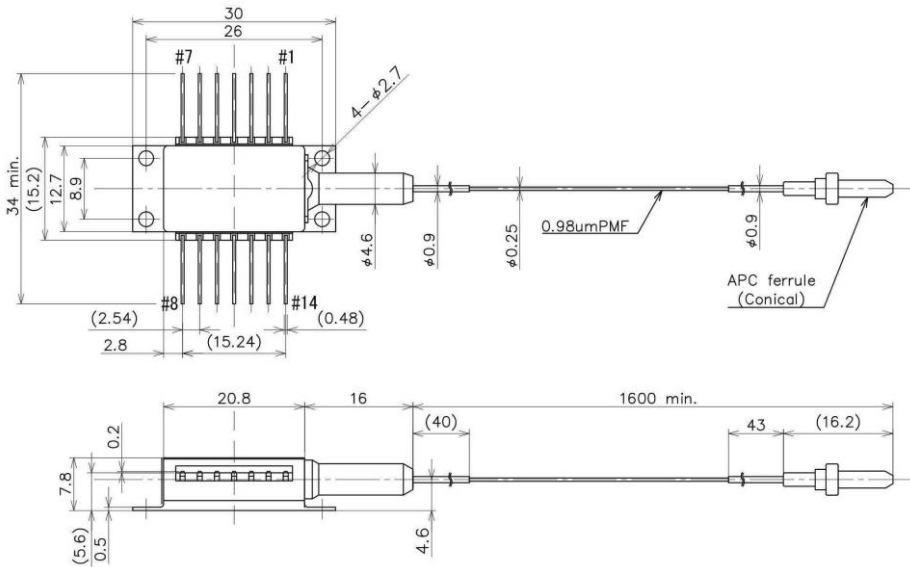

(b) 250um fiber diameter and ferrule type (QLD106L-6430G-11)

8. PIN CONFIGURATION

No.	Description	No.	Description
1	TEC (+)	8	NC
2	Thermistor	9	NC
3	PD Anode	10	Laser Anode
4	PD Cathode	11	Laser Cathode
5	Thermistor	12	NC
6	NC	13	Case Ground
7	NC	14	TEC (-)

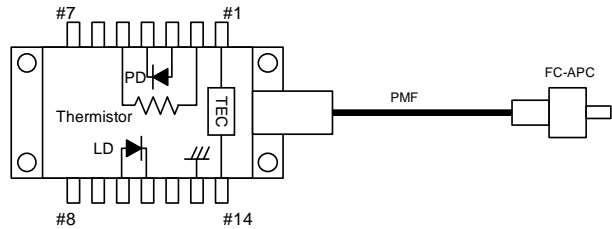

9. NOTICE

• Safety Information

This product is classified as Class 3B laser product, and complies with 21 CFR Part 1040.10.

Please do not take a look at laser lighting in operations since laser devices may cause troubles to human eyes.

Please do not eat, burn, break and make chemical process of the products since they contain GaAs material.

• Handling products


Semiconductor lasers are easily damaged by external stress such as excess temperature and ESD.

Please pay attention to handling products, and use within range of maximum ratings.

QD Laser takes no responsibility for any failure or unusual operation resulting from improper handling, or unusual physical or electrical stress.

• RoHS

This product conforms to RoHS compliance related Directive (EU) 2015/863.



DANGER

INVISIBLE LASER RADIATION
AVOID DIRECTION EXPOSURE TO BEAM

MAXIMUM OUTPUT 1 W
WAVELENGTH 1000~1200 nm
CLASS IV LASER PRODUCT

LASER DIODE



AVOID EXPOSURE—Invisible Laser Radiation is emitted from this aperture.

This product complies with 21 CFR Part 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No.50, dated June 24, 2007

QD Laser, Inc.

1-1 Minamiwataridacho, Kawasaki-ku, Kawasaki, Kanagawa, 210-0855 Japan

QD Laser, Inc.

Contact : info@qdlaser.com <https://www.qdlaser.com>

Copyright 2020 All Rights Reserved by QD Laser, Inc.

Keihin Bldg. 1F 1-1 Minamiwatarida-cho, Kawasaki-ku, Kawasaki, Kanagawa Zip 210-0855 Japan

All company or product names mentioned herein are trademarks or registered trademarks of their respective owners. Information provided in this data sheet is accurate at time of publication and is subject to change without advance notice.