

# High Power Laser Diode 4-Pin Fiber Module




## Part Number: 4PN-117

High Power 4-Pin Fiber Coupled Module  
Multi-Mode Fabry-Perot Laser Diode  
CW Wavelength at 1375nm

## Features

- High Output Power
- High Dynamic Range
- High Efficiency
- 4-Pin Fiber Coupled Module
- Cost Effective

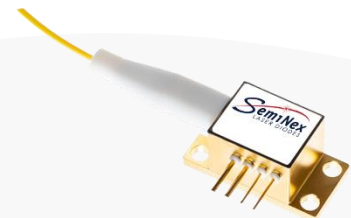

## Application

- Professional Medical
- Aerospace



SemiNex delivers the highest available power at infrared wavelengths between 12xx and 19xx nm. When necessary, we will further optimize the design of our InP and GaSb laser chips to meet our customers' specific optical and electrical performance needs. Diodes, bars and packages are tested to meet customer and market performance demands. Typical results and packaging options are shown. Contact SemiNex for additional details or to discuss your specific requirements.


SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com

# High Power Laser Diode 4-Pin Fiber Module



## Specification

4PN-117



| Optical                 | Symbol          | Typ.      | Units                |
|-------------------------|-----------------|-----------|----------------------|
| Center Wavelength       | $\lambda_c$     | 1375      | nm ( $\pm 20$ )      |
| Output Power (CW)*      | $P_{out}$       | 4.3       | watts ( $\pm 10\%$ ) |
| Spectral Width FWHM     | $\Delta\lambda$ | 10        | nm                   |
| Slope Efficiency        | $\eta$          | 0.36      | W/A                  |
| Optical Fiber Core Dia. |                 | 105       | $\mu\text{m}$        |
| Optical Fiber NA        |                 | 0.22      |                      |
| Electrical              | Symbol          |           | Units                |
| Power Conversion Eff.   | $\eta$          | 22        | %                    |
| Operating Current       | $I_{op}$        | 12        | A                    |
| Threshold Current       | $I_{TH}$        | 0.5       | A                    |
| Operating Voltage       | $V_{op}$        | 1.6       | V                    |
| Mechanical              | Symbol          |           | Units                |
| Fiber Length            |                 | 1.5       | meters               |
| Connector Type          |                 | SMA905    |                      |
| Thermistor Constant     |                 | 3477      | $\beta$              |
| Thermistor Resistance   |                 | 10        | K ohm                |
|                         |                 | Range     |                      |
| Operating Temp.**       |                 | -40 to 60 | $^{\circ}\text{C}$   |
| Storage Temp.           |                 | -40 to 80 | $^{\circ}\text{C}$   |

PLEASE NOTE: The 4 Pin laser package is not electrically isolated. The package body is the anode connection. Care should be taken in mounting and installation.

\*Specified values are rated at a constant heat sink temperature of 20°C.

\*\*High temperature operation will reduce performance and MTTF. Unless otherwise indicated all values are nominal.

### WARNING - FIBER HANDLING

- Do NOT bend the fiber tighter than 26 mm radius during installation or handling.
- Do NOT bend the fiber tighter than 52 mm radius during normal operation or long-term use
- Exceeding these limits may cause permanent fiber damage and increased optical loss

SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com



# High Power Laser Diode 4-Pin Fiber Module




## SemiNex Laser Diodes 4PN-117

### Graphs & Data

#### Typical 4PN L-I-V Characteristics

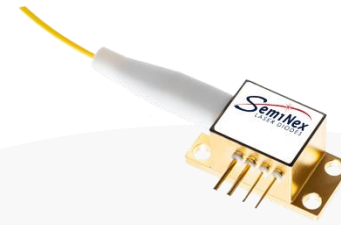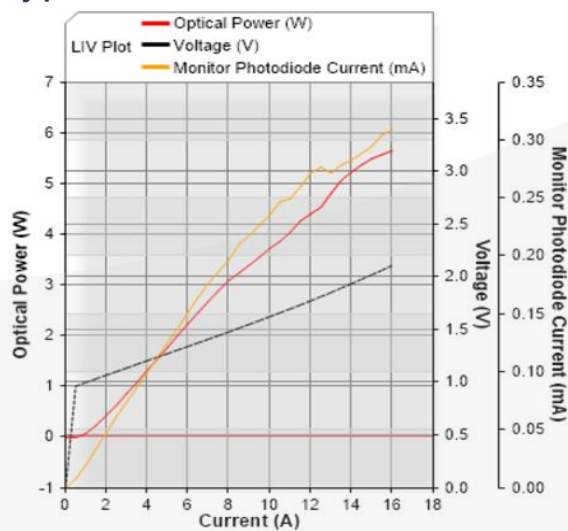

#### Typical 4PN Output Spectrum


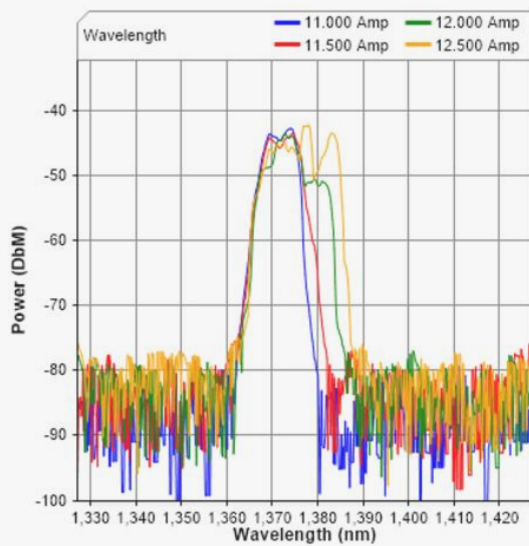


SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com

# High Power Laser Diode 4-Pin Fiber Module



## Mechanical Drawing

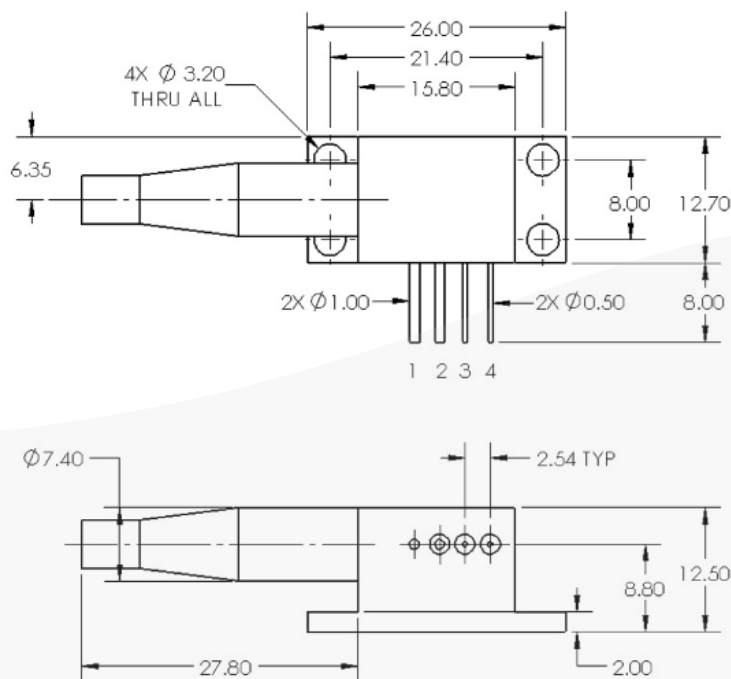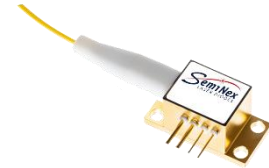

PIN OUT: (FOR REFERENCE ONLY, REFER TO DOCUMENTATION SUBMITTED WITH PRODUCT FOR ACTUAL PIN OUT)

1. LD ANODE (+)
2. LD CATHODE (-)
3. PD (-) or THERMISTOR
4. PD (+) or THERMISTOR

All statements, technical information and recommendations related to the product herein are based upon information believed to be reliable or accurate. The accuracy or completeness herein is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. SemiNex Corporation reserves the right to change at any time without notice the design, specification, deduction, fit or form of its described herein, including withdrawal at any time of a product offered for sale herein. Users are encouraged to visit [www.seminex.com](http://www.seminex.com) for the latest data. SemiNex Corporation makes no representations that the products herein are free from any intellectual property claims of others. Please contact SemiNex for more information. 2024 SemiNex Corporation



SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • [sales@seminex.com](mailto:sales@seminex.com)